


 racks  
**dynamic**



server racks  
**cabling racks**  
 etsi racks




 racks  
**dynamic**

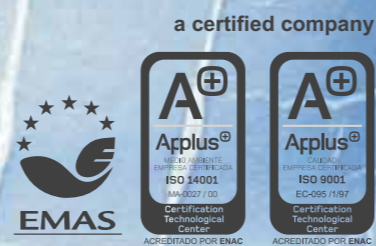


**SAIFOR S.L.**  
**Headquarters & manufacturing**  
 Poligono Industrial La Plana, nave 4  
 08785 VALLBONA D'ANOIA (Barcelona) SPAIN  
 Tel. +34 937 718 338 - Fax +34 937 718 447  
 www.saifor.com - saifor@saifor.com

**SAIFOR Benelux BVBA**  
 Prins Boudewijnlaan 17 unit 4  
 2550 KONTICH - Belgium  
 Tel. +32 3 444 05 00 - Fax. +32 3 444 05 09  
 www.saifor.be - info@saifor.be

**SAIFOR France S.A.R.L.**  
 Zone Industrielle des Glaises  
 9, Rue Salvador Allende  
 91120 PALAISEAU - France  
 Tel. +33 01 69191290 - Fax +33 01 69191291  
 www.saifor.fr - saifor@saifor.fr

**SAIFOR Chile.**  
 Gran Avda. José Miguel Carrera, 5018 Of. 304  
 San Miguel, SANTIAGO - CHILE  
 Tel. +56 2 556 82 03 - Fax. +56 2 556 88 08  
 www.saifor.cl - saifor@saifor.cl



# server racks dynamic cabling racks etsi racks

## Multipurpose cabinet for Cabling, Server & ETSI applications.

**DYNAMIC** is the perfect medium range of cabinets for *CABLING*, *SERVER* and *ETSI* applications.

Each of these three versions has been carefully adapted to count with additional accessories and features for an optimum performance on its environment.

**DYNAMIC Cabling** rack is ready to provide installers with multiple solutions for cable management. Inside the racks, cables can be organized and distributed to any part in a proper and safe way, thanks to the wide range of cable management accessories for cooper & fiber.

**DYNAMIC Server** rack offers a high degree of security and stability. With depths of 800, 900 and 1000mm, Dynamic Server is the best compromise between features & benefits.

**DYNAMIC ETSI** racks, including its dedicated accessories, are designed to comply with ETSI standards for telecommunications based on the metric norm.



### STANDARDS




According to 19" norm:  
IEC 60 297 / DIN 41 494 / UNE 20 539IP 20

Protection according to norm:  
IEC 60 529 / DIN 400 50 / UNE 20 324

Load rating of 600 KG. DEB SL6  
according to norm:  
IEC 61 587-1 / UNE EN 61 587-1



### Colors

-  Frame **RAL 7035**
-  Columns **RAL 5014**
-  Inside accessories **RAL 7035**

DYNAMIC is a complete range, offering widths of 600, 800 mm, depths of 600, 800, 1000 and sizes from 15U to 47U, covering all technical requirements for medium installations. Its smart design and the complete list of quick mounting accessories allows the installers to save time and money, with excellent results.



**dynamic cabling**  
the cabling & networking rack



**dynamic server**  
the server rack



**dynamic etsi**  
the etsi rack



The "Extension" has been created and codified for installations where are required to assembly rows of racks one each other. This version is identical to the "standalone" but it is supplied without side panels and with the corresponding buying kits.